


Conventional Intrinsically Safe Mounting Base *YBN-R/4(IS)*

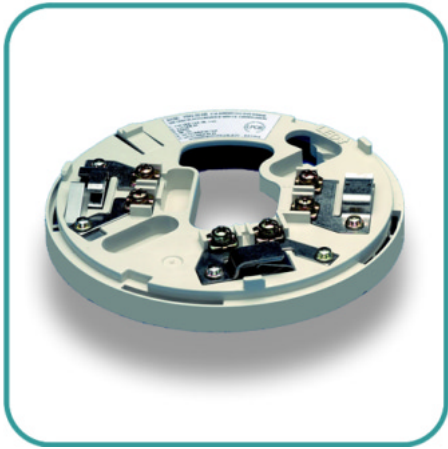

Features

- ▶ Low Profile, only 8mm
- ▶ Rugged design
- ▶ Dedicated cable screen terminal
- ▶ Accepts from 1 to 2.5mm² cables
- ▶ Quick connection via square cable clamps
- ▶ Bayonet slot, low insertion force for detectors
- ▶ Electronics free

Description

Model YBN-R/4(IS) is a Conventional Detector Mounting Base associated with the CDX Range of Intrinsically Safe Detectors and is fully compatible with the majority of existing conventional fire alarm control panels.

It is supplied with square cable clamps for secure and reliable cable termination but the base does not provide line continuity during detector removal, therefore if Call Points are being used then these should be wired onto the zone first.

Specification	
Ordering Code	YBN-R/4(IS)
Maximum Humidity	95%RH - Non Condensing (at 40°C)
Colour / Material	Ivory White / ABS
Weight (g) / Diameter (mm) / Height (mm)	51 / 100 / 8
Fixing Centres (mm)	48 ~ 74
Maximum Wire Thickness	2.5 ² mm Cables