


## 8 Way Relay Extender Board

### Features

- 8 volt free changeover relay contacts (1Amp 30V DC)
- Relay operated indications
- Remote connection to panel via RS485 serial bus
- Common footprint to other Syncro I/O board types
- All outputs programmable for cause and effects
- Can be used with other Syncro I/O modules on the same panel
- Compatible with Syncro AS panels

### Product Overview

- To further enhance the versatility of the Syncro fire alarm system, additional relay output capability can be added using Syncro relay boards.
- These boards have 8 voltage free changeover relay contacts, each of which can be individually programmed.
- Up to 32 of these boards can be connected to the dedicated RS485 communications bus in the control panel giving the capability of up to 256 additional relay outputs.
- The relay boards may be mixed on the RS485 bus with 16 channel I/O boards, 6 way sounder boards or 4 way conventional detection zone boards to provide a very flexible system of I/O to satisfy any requirement.
- All outputs are configurable in the same way as devices connected to the loops and all may be acted upon by cause and effect logic.
- These boards are typically used in applications which require more than the four standard relay outputs such as signalling to other systems or plant control.
- Standard Syncro control panels contain fixings for one sounder, relay, conventional detection or I/O board, which can easily be connected using four small signal wires to the power and comms bus within the panel.
- Consideration must be taken as to the loading on the main panel.

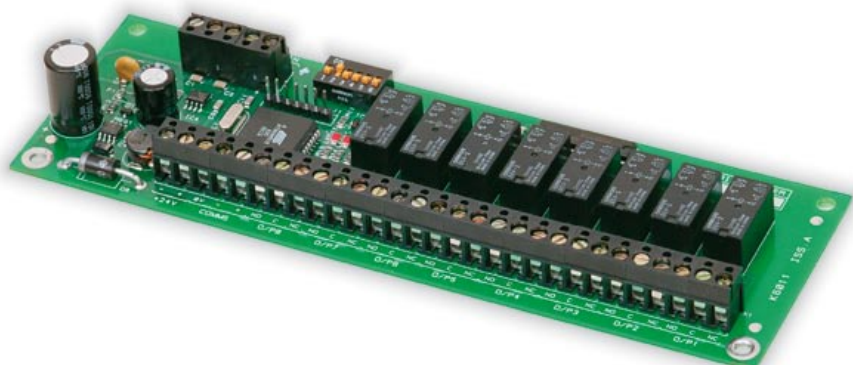

Part No. K547

## Technical

<b>Product code</b>	- K547
<b>Supply voltage range</b>	- 21 to 30 volts DC
<b>Quiescent current consumption</b>	- 10mA
<b>Operating current (all outputs on)</b>	- 250mA
<b>Output contact rating</b>	- 30V DC 1 Amp
<b>Communications</b>	- RS485 two wire
<b>Max. distance from panel</b>	- 1.2Km (using RS485 data cable)
<b>PCB size</b>	- 190mm x 61mm
<b>Fixing centres</b>	- 51.5mm x 180mm
<b>Cable capacity</b>	- 2.5mm per terminal
<b>Operating temperature</b>	- -5°C to +50°C
<b>Operating humidity</b>	- To 95% (non condensing)

## Specifications

